


Vantage[™] FIBREGLOSS ENTRY DOORS



SMOOTH WHITE AND STAINABLE TEXTURED
 AVAILABLE 6' 8" HIGH IN THE SIZES AND STYLES SHOWN BELOW

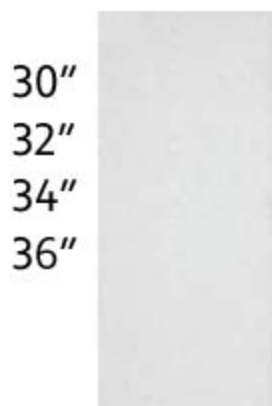

30"
 32"
 34"
 36"

TEXTURED AVAILABLE
 PLUS 34 X 82 IN SMOOTH
 WHITE



32"
 34"
 36"

TEXTURED AVAILABLE
 PLUS 34 X 82 IN
 SMOOTH WHITE



32"
 34"
 36"

TEXTURED AVAILABLE
 PLUS 34 X 82 IN SMOOTH
 WHITE



32"
 34"
 36"

TEXTURED AVAILABLE



34"
 36"

WHITE AVAILABLE



34"
 36"

WHITE AVAILABLE



14"

WHITE AVAILABLE



14"

REVERSABLE

WHITE AVAILABLE

Vantage[™] FIBREGLASS ENTRY DOORS

PRODUCT FEATURES AND BENEFITS

TOP OF DOOR IS SEALED

• WHILE OTHER DOOR DESIGNS HAVE OPEN JOINTS (BETWEEN THE STILES & TOP RAIL) ON THE TOP OF THE DOOR PANEL ALLOWING WATER PENETRATION ON OUTSWING APPLICATIONS SUCH AS GARDEN DOORS, THE VANTAGE[™] DOOR PANEL HAS A TIGHTLY SEALED TOP RAIL TO PREVENT WATER INTRUSION.

POLYURETHANE CORE

• FOAMED IN PLACE POLYURETHANE INSULATION FOR MAXIMUM EFFICIENCY

EXTRA WIDTH DOOR STILES

• DOOR STILES (AND RAILS) ARE CONSTRUCTED FROM LVL (LAMINATED VENEER LUMBER)
• AT 90 MM (3.54") IN WIDTH THE LVL HINGE & LOCK STILES ARE MUCH WIDER THAN IN OTHER FIBREGLASS OR STEEL DOOR PANELS.
• SUPERIOR CONSTRUCTION TECHNIQUES ENSURES VANTAGE[™] DOOR PANELS ARE STIFFER AND STRONGER WITH HIGHER RESISTANCE TO BREAK-INS AND MUCH BETTER RESISTANCE TO BOWING.
• READILY ACCEPTS MULTI-POINT LOCK SYSTEMS

WEATHERPROOF EDGE AROUND PERIMETER

• A COMPOSITE EDGE PROFILE 13MM (0.51") IN THICKNESS, IS ADHERED TO THE EDGE OF THE LVL STILES & RAILS AROUND THE FULL PERIMETER OF THE DOOR PANEL, TO KEEP MOISTURE AWAY FROM THE LVL STILES & RAILS.

FULL THICKNESS DOOR EDGE

• THE FULL THICKNESS, SQUARED EDGE ON THE DOOR STILES IS SIMILAR TO A WOOD DOOR EDGE AND IS MORE AESTHETICALLY PLEASING THAN THE J-BENDS ON A STEEL DOOR. THE SQUARED EDGE GIVES A BETTER SEAL AGAINST THE FRAME'S WEATHER-STRIP AND PROVIDES MORE ROOM TO INSTALL A MORTISE LATCH.

DOOR SKIN - WOODGRAIN TEXTURED (TAN) OR SMOOTH SKIN (WHITE)

• FIBREGLASS SKINS, 2MM (0.08") IN THICKNESS, BONDED TO THE FACES OF STILES & RAILS ARE OVER 3 TIMES THE THICKNESS OF STANDARD 24 GAUGE STEEL DOORS
• HIGHLY RESISTANT TO DENTING, CRACKING OR SPLITTING
• WON'T ROT OR RUST
• DEEP AND CRISP EMBOSMENTS
• FACTORY SEALED TO RESIST MOISTURE (NO FURTHER PAINTING REQUIRED)
• CAN BE REPAINTED OTHER COLOURS IF DESIRED
• COLOUR IMPREGNATED SKINS (SAME COLOUR THROUGHOUT) ON SMOOTH SKIN (WHITE) PANELS MEANS SCRATCHES ARE LESS VISIBLE IF SURFACE COATING BECOMES SCRATCHED OR DAMAGED BY HOMEOWNER.
• WHITE COLOUR ON SMOOTH SKIN PANELS IS A VERY CLOSE MATCH TO EKTACRON[®] FRAME SYSTEM COLOUR.

INTELLIGENT DESIGN

VANTAGE[™] FIBREGLASS DOORS COMBINE THE BEST PROPERTIES OF THE MATERIALS UTILIZED IN THEIR CONSTRUCTION: THE STRENGTH AND STIFFNESS OF LAMINATED VENEER LUMBER STILES, THE MAINTENANCE-FREE PROPERTIES OF THE COMPOSITE EDGES, AND THE RESILIENCE OF THE FIBREGLASS SKINS COMBINE TO ENSURE MAXIMUM PERFORMANCE IN THE MOST EXTREME CLIMATIC CONDITIONS.

AVAILABILITY

• ALL POPULAR STYLES AND SIZES AVAILABLE
• HIGH VALUE AT A COMPETITIVE PRICE

